



HTM240120B-31W-N3P-V02

产品名称 (Product name) : 黑白点阵 LCM
型 号 (Model) : HTM240120B-31W-N3P-V02
接 口 (Interface) : MCU8080
日 期 (Date) : 2024-02-27

编码: QR-R-011 A/0

序号:

深圳市鑫洪泰电子科技有限公司 Shenzhen Hot Display Technology Co.,Ltd		
编制 Prepared by	审核 Checked by	核准 Approved by

Rev.	Descriptions	Date
01	Prelimiay Release	2024-02-27

Table of Content

1. Basic Specifications	-----	3
1.1 Display Specifications	-----	3
1.2 Mechanical Specifications	-----	3
1.3 Circuit Diagram	-----	3
1.4 Terminal Function	-----	4
1.5 Product Outline	-----	5
2. Absolute Maximum Ratings	-----	6
3. Electrical Characteristics	-----	6
3.1 DC Characteristics	-----	6
3.2 LED Backlight Circuit	-----	7
3.3 Reset Timing	-----	7
4. Function specifications	-----	8
4.1 The Parallel Interface	-----	8
4.2 Basic Setting	-----	9
5. Inspection Standards	-----	10
6. Handling Precautions	-----	11
6.1 Mounting method	-----	11
6.2 Cautions of LCD handling and cleaning	-----	11
6.3 Caution against static charge	-----	11
6.4 Packaging	-----	11
6.5 Caution for operation	-----	11
6.6 Storage	-----	11
6.7 Safety	-----	11


1. Basic Specifications

1.1 Display Specifications


- 1>LCD Display Mode : FSTN, Positive, Transflective
- 2>Viewing Angle : 12H
- 3>Driving Method : 1/128 Duty, 1/10Bias
- 4>Backlight : White LED (5PCS)

1.2 Mechanical Specifications

- 1>Outline Dimension : 84.0x 50.0x 6.6mm (See attached Outline Drawing for Details)

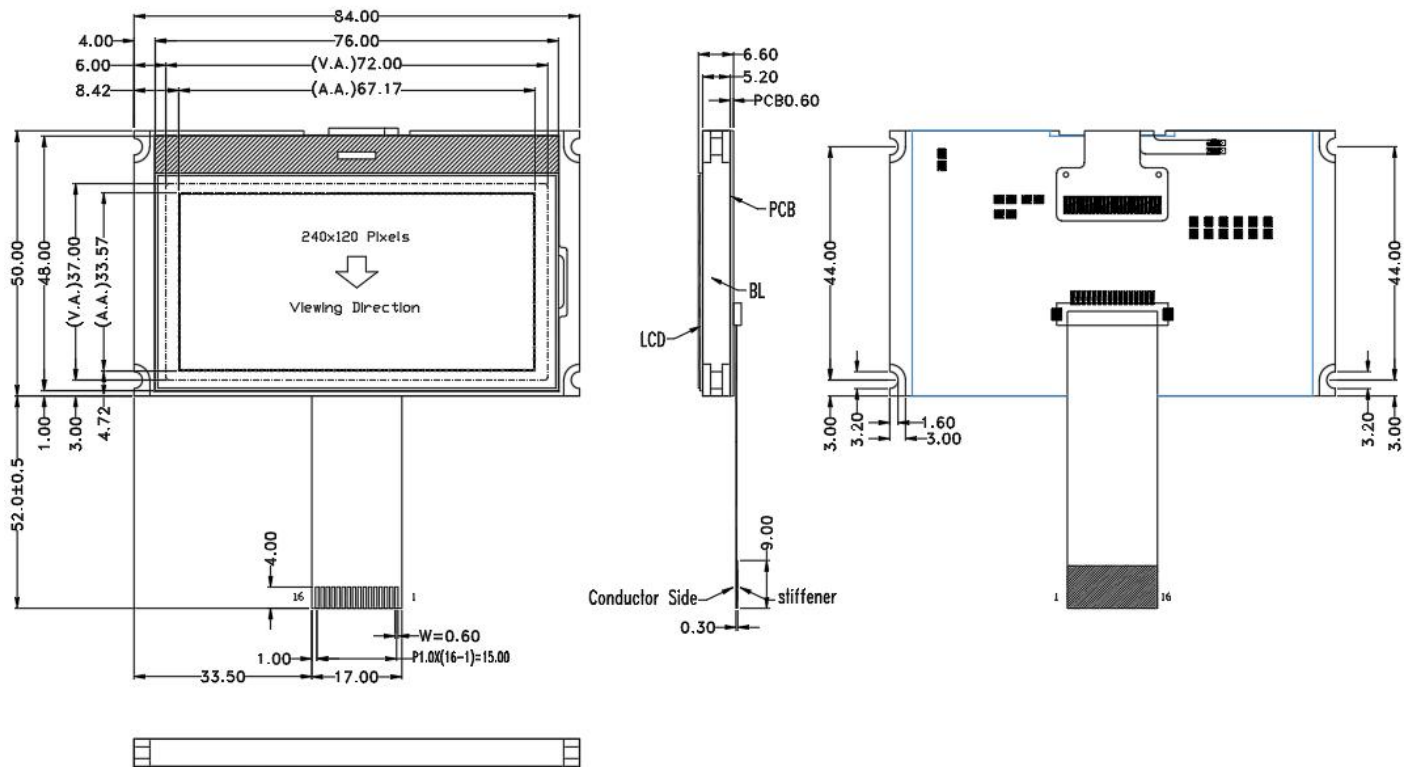


1.3 Circuit Diagram

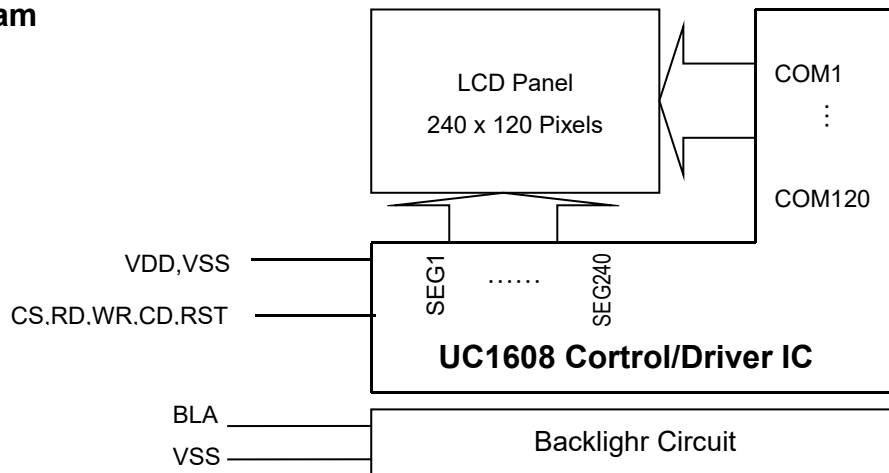

1.4 Terminal Function

Pin No.	Pin Name	Function
1	VSS	Power Supply, (VSS/0V)
2	VDD	Positive Power Supply(3.3V)
3	D7	8Bit Date bus
4	D6	
5	D5	
6	D4	
7	D3	
8	D2	
9	D1	
10	D0	
11	RD	Read (/RD) control signal input.
12	WR	Write (/WR) control signal input
13	DC	DC = "H": Indicates that D0 to D7 are display data. DC = "L": Indicates that D0 to D7 are control data.
14	RST	Rester Pin(L->H)
15	CS	Chip Select
16	BLA	Backlight Power Supply +(3.3V)

1.5 Product Outline

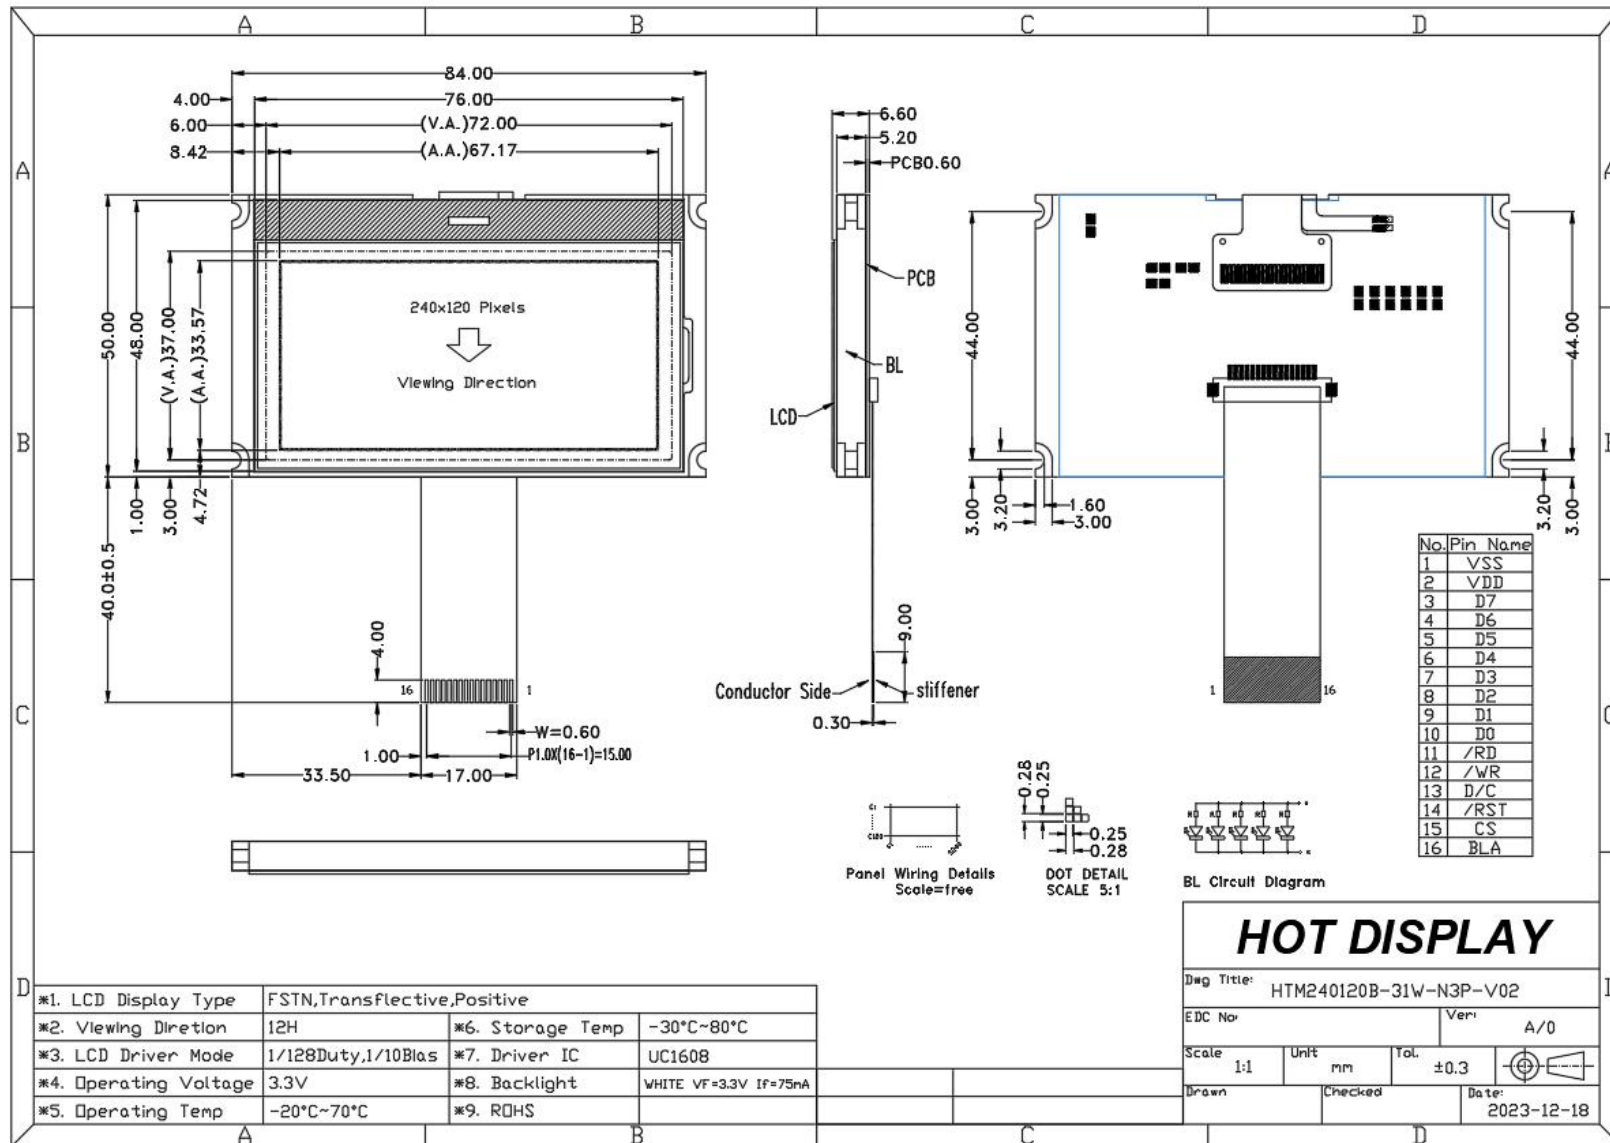

2. Absolute Maximum Ratings

Items	Symbol	MIN.	MAX.	Unit	Condition
Supply Voltage	V _{DD}	-0.3	+3.6	V	V _{SS} = 0V
	V _{DD2}	-0.3	+3.6	V	V _{SS} = 0V
Input Voltage	V _{IN}	-0.3	V _{DD} +0.3	V	V _{SS} = 0V
Operating Temperature	T _{OP}	-20	+70	°C	No Condensation
Storage Temperature	T _{st}	-30	+80	°C	No Condensation

3. Electrical Characteristics

3.1 DC Characteristics


(V_{SS} = 0V, V_{DD} = 2.4 to 3.6V, T_a = -40~85°C)

Items	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Operating Voltage(1)	V _{DD}	3.0	-	3.3	V	-
Driver Voltage	V _{LCD}	-0.3	-	19.0	V	-
Input High Voltage	V _{IH}	0.8 x V _{DD}	-	V _{DD}	V	CS,RD,WR,RST,CD
Input Low Voltage	V _{IL}	V _{SS}	-	0.2 x V _{DD}	V	
Output High Voltage	V _{OH}	0.8 x V _{DD}	-	V _{DD}	V	I _{OH} = -0.5mA
Output Low Voltage	V _{OL}	V _{SS}	-	0.2 x V _{DD}	V	I _{OL} = 0.5mA
Input Leakage Current	I _{LI}	-	-	1.5	μA	V _{IN} = V _{DD} or V _{SS}

3.2 LED Backlight Circuit

V_{SS} = 0V, T_{OP} = 25°C

Items	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Forward Voltage	V _f BLA	-	3.3	-	V	
Forward Current	I _f BLA	-	75	90	mA	-

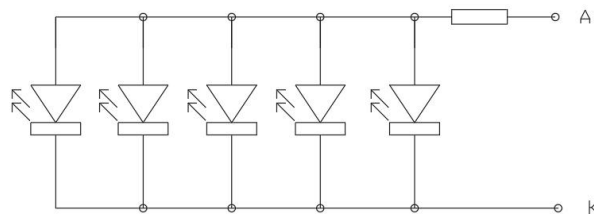

3.3 AC Characteristics
MCU8080

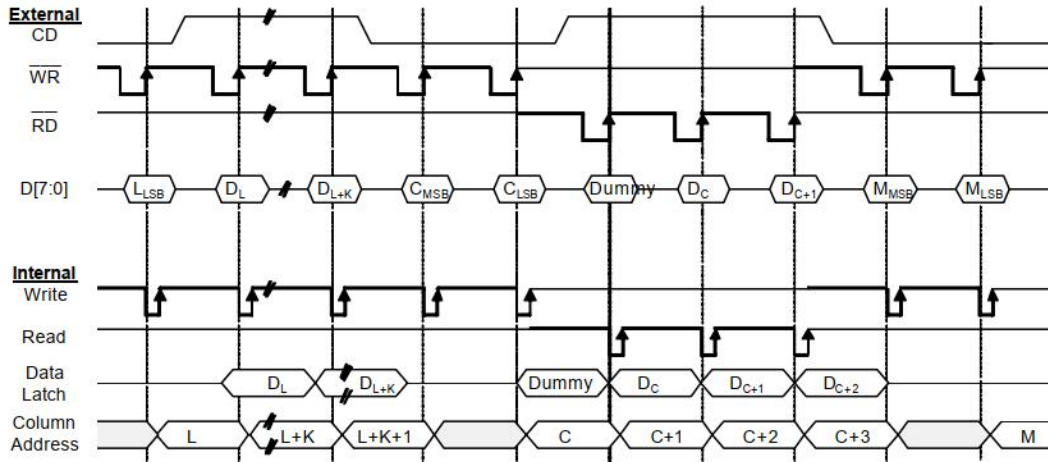


FIGURE 4: 8 bit Parallel Interface & Related Internal Signals

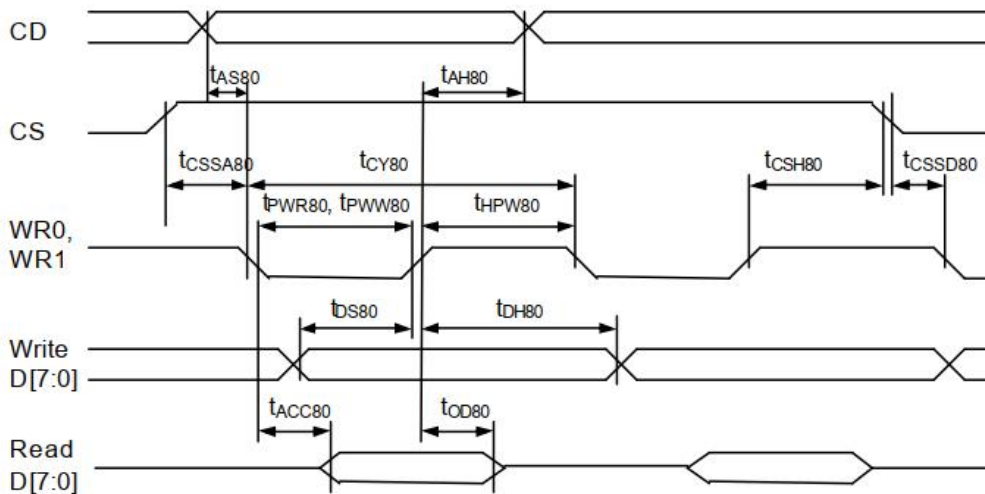


FIGURE 15: Parallel Bus Timing Characteristics (for 8080 MCU)

3.3 Resret Timing




FIGURE 19: Reset Characteristics

(2.7V ≤ V_{DD} < 3.3V, T_a = -30 to +85 °C)

Symbol	Signal	Description	Condition	Min.	Max.	Units
t _{RW}	RST	Reset low pulse width		1000	-	nS

4. Function specifications

4.1 Display data format

MSF		Line																	MY-0		MY-1			
0	1	Address																	SL-0	SL-16	SL-0	SL-16	SL-16	
D0	D7	00H																	COM1	COM113	COM128	COM98	COM16	---
D1	D6	01H																	COM2	COM114	COM127	COM95	COM15	---
D2	D5	02H																	COM3	COM115	COM126	COM94	COM14	---
D3	D4	03H																	COM4	COM116	COM125	COM93	COM13	---
D4	D3	04H																	COM5	COM117	COM124	COM92	COM12	---
D5	D2	05H																	COM6	COM118	COM123	COM91	COM11	---
D6	D1	06H																	COM7	COM119	COM122	COM90	COM10	---
D7	D0	07H																	COM8	COM120	COM121	COM89	COM9	---
D0	D7	08H																	COM9	COM121	COM120	COM88	COM8	---
D1	D6	09H																	COM10	COM122	COM119	COM87	COM7	---
D2	D5	0AH																	COM11	COM123	COM118	COM86	COM6	---
D3	D4	0BH																	COM12	COM124	COM117	COM85	COM5	---
D4	D3	0CH																	COM13	COM125	COM116	COM84	COM4	---
D5	D2	0DH																	COM14	COM126	COM115	COM83	COM3	---
D6	D1	0EH																	COM15	COM127	COM114	COM82	COM2	---
D7	D0	0FH																	COM16	COM128	COM113	COM81	COM1	---
D0	D7	10H																	COM17	COM1	COM112	COM80	COM128	---
D1	D6	11H																	COM18	COM2	COM111	COM79	COM127	---
D2	D5	12H																	COM19	COM3	COM110	COM78	COM126	---
D3	D4	13H																	COM20	COM4	COM109	COM77	COM125	---
D4	D3	14H																	COM21	COM5	COM108	COM76	COM124	---
D5	D2	15H																	COM22	COM6	COM107	COM75	COM123	---
D6	D1	16H																	COM23	COM7	COM106	COM74	COM122	---
D7	D0	17H																	COM24	COM8	COM105	COM73	COM121	---
D0	D7	18H																	COM25	COM9	COM104	COM72	COM120	COM98
D1	D6	19H																	COM26	COM10	COM103	COM71	COM119	COM95
D2	D5	1AH																	COM27	COM11	COM102	COM70	COM118	COM94
D3	D4	1BH																	COM28	COM12	COM101	COM69	COM117	COM93
D4	D3	1CH																	COM29	COM13	COM100	COM68	COM116	COM92
D5	D2	1DH																	COM30	COM14	COM99	COM67	COM115	COM91
D6	D1	1EH																	COM31	COM15	COM98	COM66	COM114	COM90
D7	D0	1FH																	COM32	COM16	COM97	COM65	COM113	COM89
D0	D7	70H																	COM113	COM97	COM16	---	COM32	---
D1	D6	71H																	COM114	COM98	COM15	---	COM31	---
D2	D5	72H																	COM115	COM99	COM14	---	COM30	---
D3	D4	73H																	COM116	COM100	COM13	---	COM29	---
D4	D3	74H																	COM117	COM101	COM12	---	COM28	---
D5	D2	75H																	COM118	COM102	COM11	---	COM27	---
D6	D1	76H																	COM119	COM103	COM10	---	COM26	---
D7	D0	77H																	COM120	COM104	COM9	---	COM25	---
D0	D7	78H																	COM121	COM105	COM8	---	COM24	---
D1	D6	79H																	COM122	COM106	COM7	---	COM23	---
D2	D5	7AH																	COM123	COM107	COM6	---	COM22	---
D3	D4	7BH																	COM124	COM108	COM5	---	COM21	---
D4	D3	7CH																	COM125	COM109	COM4	---	COM20	---
D5	D2	7DH																	COM126	COM110	COM3	---	COM19	---
D6	D1	7EH																	COM127	COM111	COM2	---	COM18	---
D7	D0	7FH																	COM128	COM112	COM1	---	COM17	---
																			128	96	128	96	MUX	

MX	0	SEG1	SEG2	SEG3	SEG4	SEG5	SEG6	SEG7	SEG8	SEG9	SEG10	SEG11	SEG12	SEG13	SEG14	SEG15	SEG16	SEG17	SEG18	SEG19	SEG20
	1	SEG21	SEG22	SEG23	SEG24	SEG25	SEG26	SEG27	SEG28	SEG29	SEG30	SEG31	SEG32	SEG33	SEG34	SEG35	SEG36	SEG37	SEG38	SEG39	SEG40

Example for memory mapping: let MX = 0, MY = 0, SL = 0, MSF = 0, according to the data shown in the above table:

- ⇒ Page 0 SEG 1: 00011110b
- ⇒ Page 0 SEG 2: 01111000b

4.2 Commands Table

COMMAND TABLE


The following is a list of host commands supported by UC1608

C/D: 0: Control, 1: Data
 W/R: 0: Write Cycle, 1: Read Cycle
 # Useful Data bits
 - Don't Care

	Command	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0	Action	Default
1	Write Data Byte	1	0	#	#	#	#	#	#	#	#	Write 1 byte	N/A
2	Read Data Byte	1	1	#	#	#	#	#	#	#	#	Read 1 byte	N/A
3	Get Status	0	1	BZ	MX	DE	RS	WA	GN1	GN0	1	Get Status	N/A
4	Set Column Address LSB	0	0	0	0	0	0	#	#	#	#	Set CA[3:0]	0
	Set Column Address MSB	0	0	0	0	0	1	#	#	#	#	Set CA[7:4]	0
5	Set Mux Rate and temperature compensation.	0	0	0	0	1	0	0	#	#	#	Set {MR, TC[1:0]}	MR: 1b TC: 00b
6	Set Power Control	0	0	0	0	1	0	1	#	#	#	Set PC[2:0]	101b
7	Set Adv. Program Control. (double byte command)	0	0	0	0	1	1	0	0	0	R	For UltraChip only. Do not use.	N/A
		0	0	#	#	#	#	#	#	#	#		
8	Set Start Line	0	0	0	1	#	#	#	#	#	#	Set SL[5:0]	0
9	Set Gain and Potentiometer (double-byte command)	0	0	1	0	0	0	0	0	0	1	Set {GN[1:0], PM[5:0]}	GN=3 PM=0
		0	0	#	#	#	#	#	#	#	#		
10	Set RAM Address Control	0	0	1	0	0	0	1	#	#	#	Set AC[2:0]	001b
11	Set All-Pixel-ON	0	0	1	0	1	0	0	1	0	#	Set DC[1]	0=disable
12	Set Inverse Display	0	0	1	0	1	0	0	1	1	#	Set DC[0]	0=disable
13	Set Display Enable	0	0	1	0	1	0	1	1	1	#	Set DC[2]	0=disable
14	Set Fixed Lines	0	0	1	0	0	1	#	#	#	#	Set FL[3:0]	0
15	Set Page Address	0	0	1	0	1	1	#	#	#	#	Set PA[3:0]	0
16	Set LCD Mapping Control	0	0	1	1	0	0	#	#	#	#	Set LC[3:0]	0
17	System Reset	0	0	1	1	1	0	0	0	1	0	System Reset	N/A
18	NOP	0	0	1	1	1	0	0	0	1	1	No operation	N/A
19	Set LCD Bias Ratio	0	0	1	1	1	0	1	0	#	#	Set BR[1:0]	10b=12
20	Reset Cursor Mode	0	0	1	1	1	0	1	1	1	0	AC[3]=0, CA=CR	N/A
21	Set Cursor Mode	0	0	1	1	1	0	1	1	1	1	AC[3]=1, CR=CA	N/A
22	Set Test Control (double byte command)	0	0	1	1	1	0	0	1	TT		For UltraChip only. Do not use.	N/A
		0	0	#	#	#	#	#	#	#	#		

* Other than commands listed above, all other bit patterns may result in undefined behavior.

5. Inspection Standards

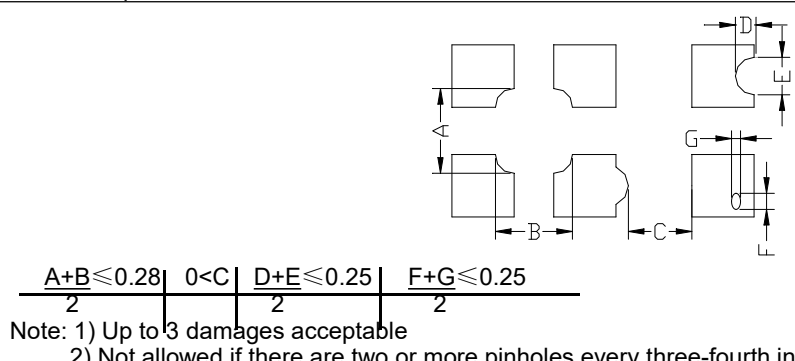Item	Criterion for defects	Defect type
1) Display on inspection	(1) Non display (2) Vertical line is deficient (3) Horizontal line is deficient (4) Cross line is deficient	Major
2) Black / White spot	Size Φ (mm) $\Phi \leq 0.3$ Acceptable number Ignore (note) $0.3 < \Phi \leq 0.45$ 3 $0.45 < \Phi \leq 0.6$ 1 $0.6 < \Phi$ 0	Minor
3) Black / White line	Length (mm) Width (mm) Acceptable number $L \leq 10$ $W \leq 0.03$ Ignore $5.0 \leq L \leq 10$ $0.03 < W \leq 0.04$ 3 $5.0 \leq L \leq 10$ $0.04 < W \leq 0.05$ 2 $1.0 \leq L \leq 10$ $0.05 < W \leq 0.06$ 2 $1.0 \leq L \leq 10$ $0.06 < W \leq 0.08$ 1 $L \leq 10$ $0.08 < W$ follows 2) point defect Defects separate with each other at an interval of more than 20mm	Minor
4) Display pattern	 <p style="text-align: center;"> $\frac{A+B \leq 0.28}{2}$ $0 < C$ $\frac{D+E \leq 0.25}{2}$ $\frac{F+G \leq 0.25}{2}$ </p> <p>Note: 1) Up to 3 damages acceptable 2) Not allowed if there are two or more pinholes every three-fourth inch.</p>	Minor
5) Spot-like contrast irregularity	Size Φ (mm) Acceptable Number $\Phi \leq 0.7$ Ignore (note) $0.7 < \Phi \leq 1.0$ 3 $1.0 < \Phi \leq 1.5$ 1 $1.5 < \Phi$ 0 Note: 1) Conformed to limit samples. 2) Intervals of defects are more than 30mm.	Minor
6) Bubbles in polarizer	Size Φ (mm) Acceptable Number $\Phi \leq 0.4$ Ignore (note) $0.4 < \Phi \leq 0.65$ 2 $0.65 < \Phi \leq 1.2$ 1 $1.2 < \Phi$ 0	Minor
7) Scratches and dent on the polarizer	Scratches and dent on the polarizer shall be in the accordance with "2) Black/white spot", and "3) Black/White line".	Minor
8) Stains on the surface of LCD panel	Stains which cannot be removed even when wiped lightly with a soft cloth or similar cleaning.	Minor
9) Rainbow color	No rainbow color is allowed in the optimum contrast on state within the active area.	Minor
10) Viewing area encroachment	Polarizer edge or line is visible in the opening viewing area due to polarizer shortness or sealing line.	Minor
11) Bezel appearance	Rust and deep damages that are visible in the bezel are rejected.	Minor
12) Defect of land surface contact	Evident crevices that are visible are rejected.	Minor
13) Parts mounting	(1) Failure to mount parts (2) Parts not in the specifications are mounted (3) For example: Polarity is reversed, HSC or TCP falls off.	Minor
14) Part alignment	(1) LSI, IC lead width is more than 50% beyond pad outline. (2) More than 50% of LSI, IC leads is off the pad outline.	Minor
15) Conductive foreign matter (solder ball, solder hips)	(1) $0.45 < \Phi$, $N \geq 1$ (2) $0.3 < \Phi \leq 0.45$, $N \geq 1$, Φ : Average diameter of solder ball (unit: mm) (3) $0.5 < L$, $N \geq 1$, L : Average length of solder chip (unit: mm)	Minor
16) Bezel flaw	Bezel claw missing or not bent	Minor
17) Indication on name plate (sampling indication label)	(1) Failure to stamp or label error, or not legible.(all acceptable if legible) (2) The separation is more than 1/3 for indication discoloration, in which the characters can be checked.	Minor

6. Handling Precautions

6.1 Mounting method

A panel of LCD module made by our company consists of two thin glass plates with polarizers that easily get damaged. And since the module is so constructed as to be fixed by utilizing fitting holes in the printed circuit board (PCB), extreme care should be used when handling the LCD modules.

6.2 Cautions of LCD handling and cleaning

When cleaning the display surface, use soft cloth with solvent (recommended below) and wipe lightly.

- Isopropyl alcohol
- Ethyl alcohol
- Trichlorotrifluoroethane

Do not wipe the display surface with dry or hard materials that will damage the polarizer surface.

Do not use the following solvent:

- Water
- Ketene
- Aromatics

6.3 Caution against static charge

The LCD module uses C-MOS LSI drivers. So we recommend you:

Connect any unused input terminal to V_{dd} or V_{ss} . Do not input any signals before power is turned on, and ground your body, work/assembly areas, assembly equipment to protect against static electricity.

6.4 Packaging

- Module employs LCD elements, and must be treated as such. Avoid intense shock and falls from a height.
- To prevent modules from degradation, do not operate or store them exposed directly to sunshine or high temperature/humidity.

6.5 Caution for operation

It is an indispensable condition to drive LCD module within the limits of the specified voltage since the higher voltage over the limits may cause the shorter life of LCD module.

-An electrochemical reaction due to DC (direct current) causes LCD undesirable deterioration so that the uses of DC (direct current) drive should be avoided.

-Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD module may show dark color in them. However those phenomena do not mean malfunction or out of order of LCD module, which will come back in the specified operating temperature.

6.6 Storage

In the case of storing for a long period of time, the following ways are recommended:

- Storage in polyethylene bag with the opening sealed so as not to enter fresh air outside in it. And with not desiccant.
- Placing in a dark place where neither exposure to direct sunlight nor light is. Keeping the storage temperature range.
- Storing with no touch on polarizer surface by any thing else.

6.7 Safety

-It is recommendable to crash damaged or unnecessary LCD into pieces and to wash off liquid crystal by either of solvents such as acetone and ethanol, which should be burned up later.

-When any liquid leaked out of a damaged glass cell comes in contact with your hands, please wash it off well at once with soap and water.